

# Product Range

Asia Pacific Yacht Coatings





Antifoulings



	Micron® AP	Micron® Extra 2	Micron® One
	Polishing	Polishing	Ablative
Key attributes	<ul style="list-style-type: none"><li>Maximum strength antifouling</li><li>Contains Biolux® technology and boosted biocide levels</li><li>Advanced performance for difficult fouling in all environments</li><li>Suitable for the widest variety of vessels</li></ul>	<ul style="list-style-type: none"><li>High strength antifouling</li><li>Contains Biolux® technology, optimizing performance and longevity</li><li>Formulated to provide improved resistance to slime</li></ul>	<ul style="list-style-type: none"><li>Seasonal ablative antifouling</li><li>Proven performance</li><li>Economical and dependable antifouling protection</li><li>Designed to erode away with use which reduces paint build-up and sanding</li></ul>
Suitable for aluminium	No	No	No
Suitable for high speed craft	●●●	●●●	●●
Longevity	●●●●	●●●●	●●
Suitable for high fouling areas	●●●●●	●●●●	●●●
Local or Global	Local	Global	Local
Thinner	Thinner No.3	Thinner No.3	Thinner No.3

● Good  
●●●●● Outstanding

Please talk to your local sales representative for further information.





	Micron® 99*	Ultra 2	VC® Offshore Hard Racing	Trilux® 33
	Self Polishing	Hard	Hard	Slow Polishing
Key attributes	<div>PRO USE ONLY</div> <ul style="list-style-type: none"><li>Optimized for superyachts and extended offshore cruising vessels</li><li>Outstanding protection in challenging fouling conditions</li><li>Formulated with unique patented SPC technology</li><li>Polishes away through a controlled chemical reaction</li></ul>	<ul style="list-style-type: none"><li>High strength, hard antifouling</li><li>Contains Biolux® technology</li><li>Ideal for fast power boats and competitive sailing</li><li>Hard, scrubbable finish</li><li>Fast dry formula allows painting and launching in the same day</li></ul>	<ul style="list-style-type: none"><li>Thin film coating for racing, sailing and performance powerboats</li><li>Quick and easy application. No sanding between coats.</li><li>Reduces friction and drag for increased racing performance</li></ul>	<ul style="list-style-type: none"><li>Formulated for use on aluminium</li><li>Slow polishing antifouling; avoids seasonal paint build-up</li><li>Available in bright colours</li><li>Proven antifouling protection for aluminium vessels of all sizes</li></ul>
Suitable for aluminium	No	No	No	Yes
Suitable for high speed craft	●●●●	●●●●●	●●●●●	●●●●
Longevity	●●●●●	●●●	●	●●●
Suitable for high fouling areas	●●●●●	●●●●	●●●	●
Local or Global	Global	Global	Global	Global
Thinner	Thinner No.3	Thinner No.3	Thinner No.3	Thinner No.3

● Good  
●●●●● Outstanding

\*Vessels over 20m

Finishes


<div><div></div><div></div><div></div></div>			
	Toplac® Plus	Interdeck	Bilgekote
	Topside Finish	Deck Finish	Interior Finish
Key attributes	<ul style="list-style-type: none"><li>A new silicone alkyd premium gloss topcoat for all substrates above the waterline</li><li>It is easy to apply by roller without the need for tipping</li><li>Toplac Plus comes in a range of bright colours and contains UV filters for increased durability</li><li>Use One UP followed by Toplac Plus to deliver the best in class topcoat system</li></ul>	<ul style="list-style-type: none"><li>Slip-resistant urethane modified alkyd deck finish that's suitable for all substrates</li><li>Easy to apply</li><li>Comes in a range of colours</li><li>Contains fine mineral additive for hard wearing, non-slip surface</li></ul>	<ul style="list-style-type: none"><li>Protects bilges, lockers and bulkheads from moisture penetration and wear and tear</li><li>Cleans easily</li><li>Chemical resistance to fumes, fuel and oil</li><li>High opacity ensures thorough coverage</li></ul>

No of components	Single pack	Single pack	Single pack
No of coats	2-3	1-2	1-2
Ease of use	●●●●	●●●●	●●●●●
Longevity	●●●●	●●●	●●●●
Abrasion resistance	●●●●	●●●●●	●●●
Local or Global	Global	Global	Global
Thinner	Thinner No.100	Thinner No.1	Thinner No.1
● Good			
●●●●● Outstanding			


\* Requires two pack primer

### What is Intergrip?

Intergrip is a synthetic, granular material that can be added to topside finishes prior to application or sprinkled onto wet paint as an aid to providing a more slip-resistant finish. The final result is determined by the amount of material added into the finish.



Primers/Undercoats


<div><div></div><div></div><div></div><div></div></div>				
	Etch Primer	Interprotect	Primocon	One Up
	Above/below water primer	Above/below water primer	Underwater Primer	Topside Undercoat
Key attributes	<ul style="list-style-type: none"><li>Two pack chromate free above and below water primer with excellent anticorrosive protection</li><li>Allows extended overcoat times without sanding</li><li>Can be applied by brush, roller or spray</li><li>Suitable for below the waterline on Aluminium only</li></ul>	<ul style="list-style-type: none"><li>High performance two-pack epoxy primer/undercoat</li><li>Formulated for all substrates above and below the waterline</li><li>Can be recoated with itself for up to 6 months</li><li>Easy to sand and quick to dry</li><li>Good abrasion resistance</li></ul>	<ul style="list-style-type: none"><li>For servicing repair and maintenance</li><li>Fast drying, one-part primer for use below the water line before antifouling is applied</li><li>Not suitable for ferrous cement</li><li>Quick drying even in poor conditions</li><li>Can be used under all major antifoulings or as a conversion coat over incompatible or to seal unknown antifoulings</li></ul>	<ul style="list-style-type: none"><li>Replaces Pre-Kote whilst still delivering the same levels of adhesion and protection</li><li>One UP is a single pack primer/undercoat for use above the waterline with International one-pack finishes and deck paints</li><li>Best in class system with International one-pack finishes and deck paints</li></ul>

Local or Global	Local	Global	Global	Global
Thinner	Do not thin	Thinner No.7	Thinner No.3	Thinner No.1




### What is Sanding Guide Coat?

Sanding Guide Coat is used to highlight fine sanding and scratch marks into easily visible blue lines that can be sanded away as you progress from coarse to fine sand paper.










Varnishes

  			
	Goldspar® Original	Goldspar® Satin	Cetol® Marine
	Exterior/Interior Varnish	Interior Varnish	Protective Timber Finish
Key attributes	<ul style="list-style-type: none"><li>Tough interior and exterior, single pack marine varnish</li><li>Excellent UV and abrasion resistance</li><li>Quick to dry, leaving a durable cured film</li><li>Suitable over existing varnish</li></ul>	<ul style="list-style-type: none"><li>Single pack marine-varnish for interior use</li><li>Resistant to hot water, mild acids and alkalis</li><li>Quick drying formula helps to reduce dust pick-up, whilst also creating a stunning finish</li></ul>	<ul style="list-style-type: none"><li>Protective, translucent and breathable timber finish for use above the waterline on interior and exterior timber</li><li>Formulated with Next Wave technology, a unique UV-absorbing package</li><li>Low maintenance</li><li>Wipe clean and recoat without sanding</li></ul>
No of coats	6-10	3	2-3
Ease of use	●●●●	●●●●	●●●●●
UV protection	●●●	—	●●●●
Finish	Gloss	Satin	Low sheen
Local or Global	Local	Global	Global
Thinner	Thinner No.1	Thinner No.1	Thinner No.1
● Good ●●●●● Outstanding			



Specialty Products

    					
	PA10	Everdure	Epigluce®	Epifill®	Epiglass®
	Specialty Primer	Specialty Primer	Epoxy Glue	Epoxy Filler	Epoxy System
Key attributes	<ul style="list-style-type: none"><li>Single pack anti-corrosive vinyl etch primer</li><li>Excellent anti-corrosive protection</li><li>Formulated for all ferrous and non ferrous metals above the waterline</li><li>Used as a concrete floor finish or primer</li><li>Quick drying primer and etching primer in one</li></ul>	<ul style="list-style-type: none"><li>Ultra-low viscosity, two-pack epoxy timber primer</li><li>For use above and below waterline before applying paint</li><li>Used to help seal and harden timber surfaces to reduce moisture uptake</li><li>Easy to apply and creates a tough, hard film</li></ul>	<ul style="list-style-type: none"><li>Thixotropic, two-pack epoxy adhesive for above and below waterline</li><li>Creates a virtually colourless glue line that's extremely tough</li><li>Doesn't sag and is therefore perfect for filling gaps and close contact type joints</li></ul>	<ul style="list-style-type: none"><li>Medium to high density, two-pack general purpose epoxy filler</li><li>Can be drilled, tapped and used under compressive loads</li><li>Perfect for coving and a wide range of filling jobs</li><li>Ideal for fairing keels</li><li>For use above and below the waterline</li></ul>	<ul style="list-style-type: none"><li>Developed to offer a comprehensive range of resin and hardener combinations for the boatbuilding industry</li><li>Including systems for gluing, filling, fairing and sheathing timber, GRP, steel, aluminium and ferro hulls</li><li>HT9000 has a simple hardener range (slow, standard and fast) to accommodate all uses. HT9000 has a 3:1 mix ratio</li></ul>
Local or Global	Local	Local	Local	Local	Global
Thinner	Thinner No.5	Thinner No.7	—	—	—


Notes

## Visit our website: international-yachtpaint.com

Our new website has arrived! It's simple, streamlined and mobile-friendly, with all our product data and expert advice never more than three clicks away. Your first port of call for any new project.

### New features include:

- Quick-search function
- Easy overview of our products
- FAQ of expert advice
- Comprehensive list of stockists
- Video guides

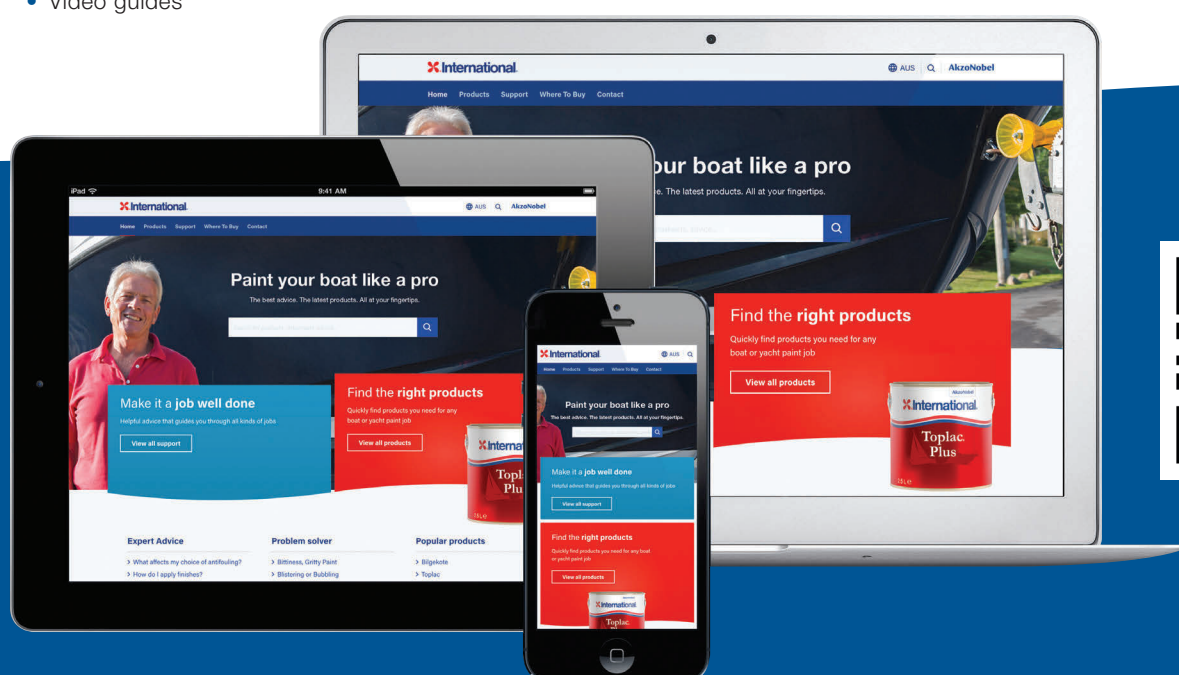

### Australia

Unit 54/76 Waterway Drive  
Coomera, Qld, 4209  
Technical Helpline: 1800 251 431  
Email: tech.support@akzonobel.com

### New Zealand

686 Rosebank Road  
PO Box 19995, Avondale, Auckland  
Tel: 64 (9) 828 3009  
Fax: 61 (9) 828 1129  
Technical Helpline: 0800 808 807  
Email: technz.support@akzonobel.com

Statements made in this brochure are advisory only and are not intended to be specific recommendations or warranties of any product, combination of products or fitness for any particular purpose. Please consult our product labels, product data sheets and/or material safety data sheets directly for complete technical information. Printed in the UK using vegetable oil and naturally occurring resin-based inks.

All trademarks mentioned in this publication are owned by, or licensed to, the AkzoNobel group of companies. © AkzoNobel 2023

9832/0519