


S6A3-T2MPTK

MARINE PROPULSION ENGINE

SPECIFICATIONS

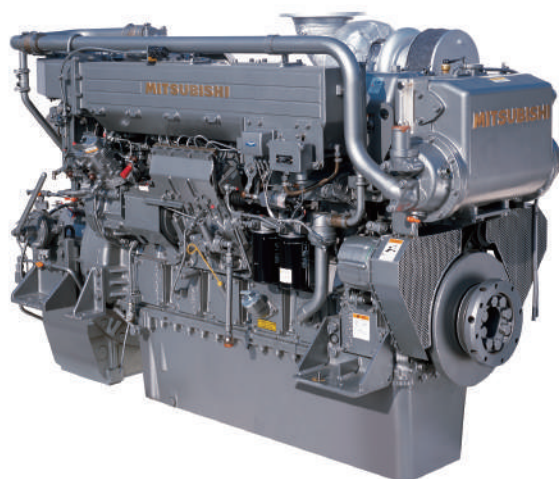


EIAPP	IMO II Compliant
Configuration	In line 6 cylinder, 4-stroke diesel
Piston	150 mm bore x 175 mm stroke
Displacement	18.56 Liter
Flywheel	SAE 14 inch, Housing SAE No.1
Governor	Mechanical
Starting system	Electric starter moter DC24V, 6.0kW
Cooling system	Engine coolant : Indirect cooling by seawater Intake air : Direct cooling by seawater
Lub. Oil capacity	90 Liter
Flesh water capacity	55 Liter
C-rating	445kW / 597HP / 1900rpm

STANDARD EQUIPMENT

Engine	Sea water direct cooling type propulsion engine MHI turbochargers, Heat exchanger Sea water pump	Gearbox (option)	MGN80B, MGN80EL, MGN81GL from Hitachi NICO
Panel	Meiyo instrument panel for W/H & E/R (Alarm trip panel) optional item	Fuel system	Mechanical control
Accessories	Exhaust flexible pipe, Exhaust thermometer Standard spare parts, Standard tools	Cooling system	Direct seawater cooling with heat exchanger
		Exhaust system	Water cooled manifold and Mitsubishi turbochargers
		Lubrication system	Forced lubrication by gear driven
		Mounting system	Rigid mounts


DIMENSIONS

Overall dimensions	Length	2090mm
	Width	1019mm
	Height	1370.5mm
Total weight (Dry)	Dry weight	2030kg±10%

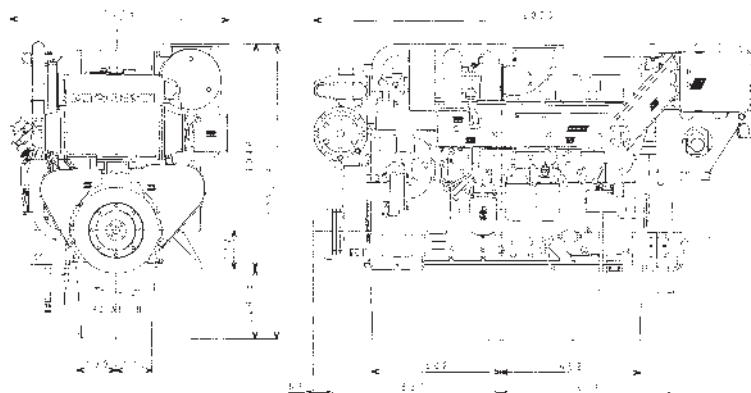

The rated power of diesel engines stated here corresponds to ISO3046-1:202 (E) and ISO 15550 : 2002 (E).
Sea water temperature : Max 32°C
Specifications are subject to change without notice. All dimensions are approximate.
For complete information refer to installation drawing. For further information consult your Mitsubishi dealer.

Performance Curve

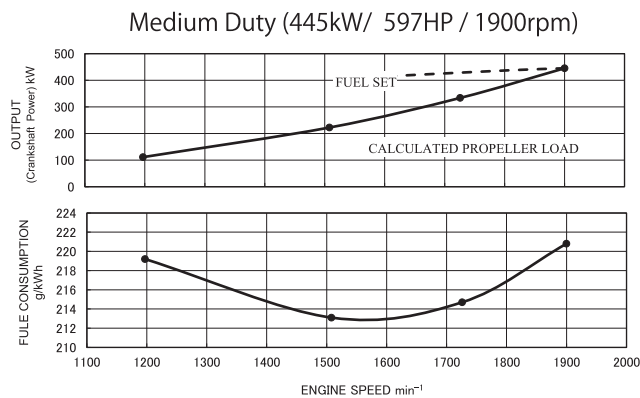

*Fuel Consumption is based on ISO3046/1 with +5% tolerance at rated power.The specifications are subject to change without notice.

CLASSIFICATION

C-rating NK, BKI, VR

RATING DEFINITIONS

Rating Definitions for Marine Propulsion Engine					
Rating	Required condition for warranty			Reference	
	Load/operating hour [*1]				
Rating	Allowable average load factor per year	Allowable average speed [*2]	Allowable continuous operation with over 90% load	Typical Operating hour per year	Typical Application
B-rating	75% or lower	91% or lower	Up to 1hr per 6hr	3000 - 4000	Pleasure Boats, Yachts, Patrol Boats, Tug Boats, Fire Fighting Boats,
C-rating	83% or lower	94% or lower	Up to 8hr per 24hr	6000	Tug Boats, Working Boats, Passenger Boats, Ferry Boats
D-rating	100% or lower	100% or lower	Unlimited	unlimited	Fishing Boats, Cargo Boats, Pusher Boats

[*1] Average load factor shall be calculated as per the formula in ISO 8528-1:2018 'Average power output(Ppp).

[*2] This condition is applied to FPP(Fixed pitch propellers). For CPP(Controllable pitch propeller),allowable average load factor shall be the conditions required for warranty.

MITSUBISHI HEAVY INDUSTRIES ENGINE & TURBOCHARGER, LTD.

MARINE ENGINE SECTION, ENGINE DEPARTMENT, ENGINE & ENERGY DIVISION
TEL: 81-42-763-7854 FAX: 81-42-761-1994

Mitsubishi Heavy Industries Engine & Turbocharger, Ltd. serves for the customers with improved products continually.
Therefore specification and some materials are subject to be changed without prior notice.
The International System of units (SI) is used in this publication.

