

SUPREME VENTUS®

100% INTELLIGENT, ZERO EMISSIONS

The Supreme Ventus is an intelligent, durable and self-regulating sealing system that guarantees zero emissions of oil for seagoing vessels. It has a constant air flow which prevents an oil-to-water interface and drains any leakage into a monitoring tank. The use of expensive bio-oils can be avoided with the Supreme Ventus.

ADVANTAGES

- Complies with the VGP and VIDA regulations
- 24/7 condition monitoring
- Zero emissions of oil
- Low Cost of Ownership
- Five-year warranty (ask for details)





VGP
COMPLIANT



CONDITION
MONITORING



LARGE
VARYING
DRAUGHTS

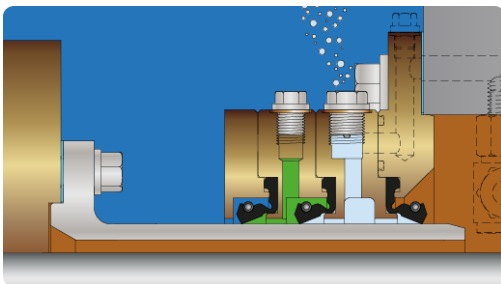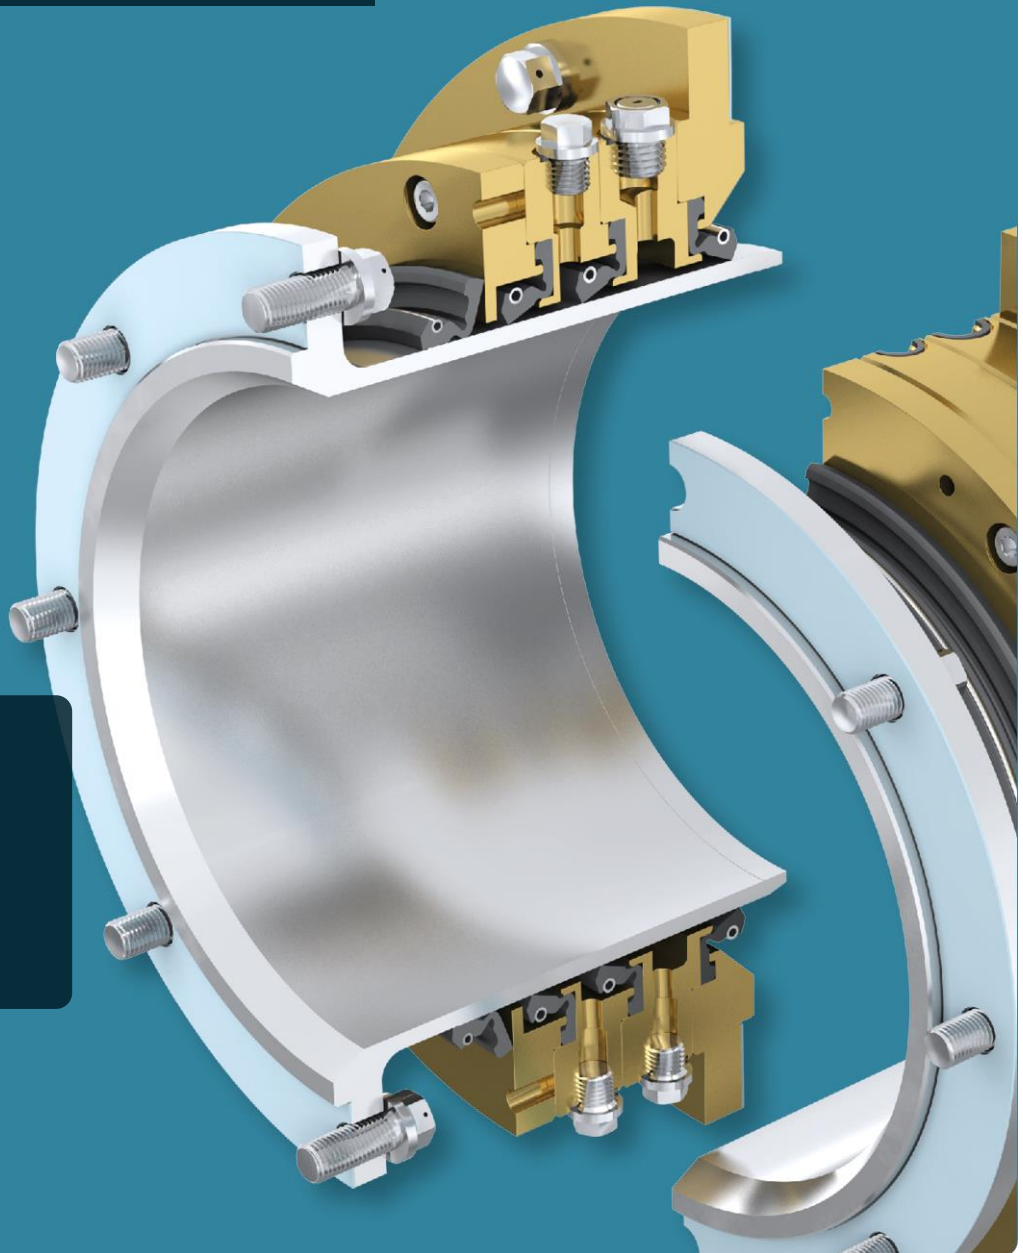


WATCH PRODUCT VIDEO

MATERIALS

- NBR/FKM/FKM-EAL lip seals
- Bronze housing parts
- Stainless steel liner
- Supreme Ventus air release valve
- Optional: Hastelloy® C4 springs
- Optional: 80 liter air tight lube oil tank

Type approvals from the major classification societies are available [here](#). Curious about all customized options? [Take a look at the overview for all possibilities!](#)

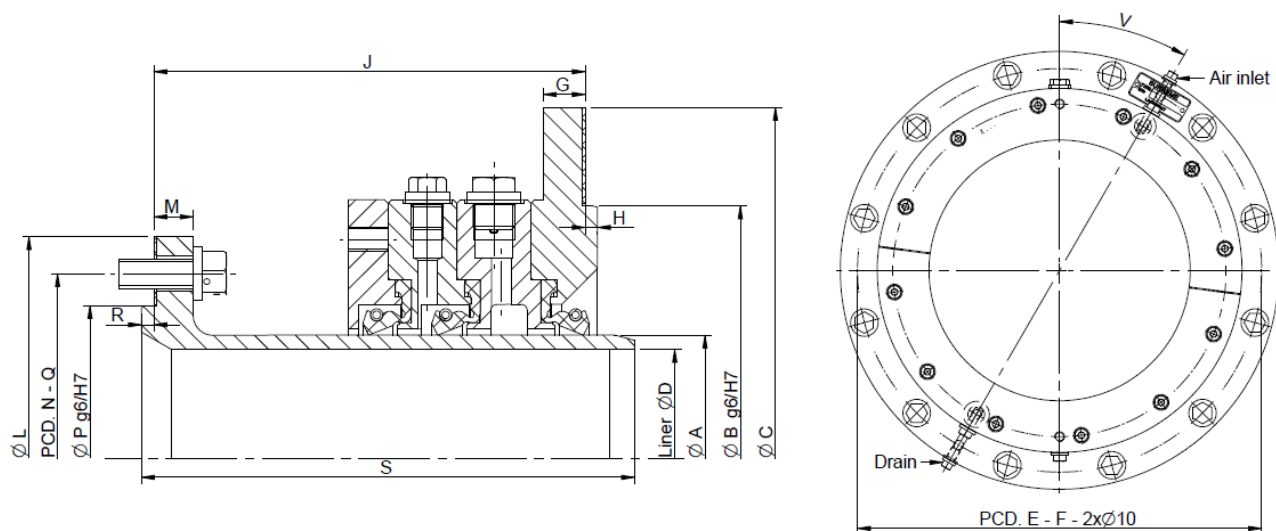

A	D	B	C	E	F	G	H	J	L	M	N	Q	P	R	S	V
140	116 - 130	225	290	260	8x M12 x 40	17	5	160	195	11	175	8x M8 x 20	150	5	176	45°
155	131 - 145	240	305	275	8x M12 x 40	17	5	160	214	11	194	8x M8 x 20	175	5	185	45°
170	146 - 160	255	320	290	8x M12 x 40	17	5	160	240	11	220	8x M8 x 20	200	5	185	45°
190	161 - 180	275	340	310	8x M12 x 40	17	5	160	270	13	240	8x M12 x 30	214	5	185	45°
200	181 - 190	285	350	320	8x M12 x 40	17	5	160	280	13	250	8x M12 x 30	224	5	185	45°
220	191 - 208	305	370	340	8x M12 x 40	17	5	160	300	13	270	8x M12 x 30	240	5	185	45°
240	209 - 228	345	425	390	12x M16 x 55	17	5	170	320	13	290	8x M12 x 30	260	5	195	30°
260	229 - 248	365	445	410	12x M16 x 55	17	5	175	340	16	310	8x M12 x 30	284	5	200	30°
280	249 - 264	385	465	430	12x M16 x 55	17	5	175	360	16	330	12x M12 x 30	300	5	200	30°
300	265 - 284	405	485	450	12x M16 x 55	17	5	175	375	16	346	12x M12 x 30	320	5	200	30°
330	285 - 314	435	515	480	12x M16 x 55	17	5	175	425	16	390	12x M12 x 30	360	6	200	30°
355	315 - 337	475	565	525	12x M20 x 60	19	5	195	450	16	416	12x M16 x 35	384	6	220	30°
380	338 - 362	500	590	550	12x M20 x 60	19	5	195	480	16	440	12x M16 x 35	406	6	220	30°

A	D	B	C	E	F	G	H	J	L	M	N	Q	P	R	S	V
400	363 - 381	520	610	570	12x M20 x 60	19	5	200	500	21	460	12x M16 x 35	424	6	225	30°
420	382 - 400	540	630	590	12x M20 x 60	19	5	200	520	21	486	12x M16 x 40	450	6	225	30°
450	401 - 428	575	675	630	12x M20 x 60	19	5	225	550	21	510	12x M16 x 40	476	7	250	22,5°
480	429 - 457	605	705	660	12x M20 x 60	22	5	225	590	21	550	12x M20 x 45	510	7	250	22,5°
500	458 - 476	625	725	680	12x M20 x 60	22	5	225	600	21	560	12x M20 x 45	526	7	250	22,5°
530	477 - 504	655	755	710	12x M20 x 60	22	5	225	630	21	590	12x M20 x 45	550	7	250	22,5°
560	505 - 532	700	820	765	12x M24 x 75	24	5	240	675	21	630	12x M20 x 45	588	8	262	22,5°
600	533 - 570	740	860	805	12x M24 x 75	24	5	240	700	21	660	12x M20 x 45	620	8	262	22,5°
630	571 - 598	770	890	835	12x M24 x 75	24	5	245	760	26	710	12x M24 x 55	670	8	268	22,5°
670	599 - 635	810	930	875	12x M24 x 75	24	5	245	820	26	750	12x M24 x 55	710	9	268	22,5°
710	636 - 672	865	990	930	16x M24 x 75	26	5	280	840	26	790	12x M24 x 55	740	9	310	22,5°
750	673 - 710	905	1030	970	16x M24 x 75	26	5	280	885	26	836	16x M24 x 55	780	9	311	22,5°
800	711 - 750	960	1090	1030	20x M24 x 75	26	5	310	945	31	890	16x M24 x 55	825	9	348	22,5°
850	751 - 795	1010	1140	1080	20x M24 x 75	26	5	310	1000	31	950	16x M24 x 55	870	9	348	22,5°
900	796 - 840	1065	1200	1135	20x M24 x 75	36	7	330	1070	31	1020	16x M24 x 55	920	9	361	22,5°
950	841 - 890	1115	1250	1185	20x M24 x 75	36	7	330	1130	31	1070	16x M24 x 55	970	9	361	22,5°